

Date: _____ Account # _____

Account Name: _____

Contact Person: _____

Phone: () _____

Customer Signature: _____

Capacity: _____ **Quantity:** _____

Hub Face: _____ **Spring Center:** _____

Axle Type: Beam only Idler Brake Axle

Brake Flange (Beam & Idler)

Bearing Lubrication

Grease Oil E-Z Lube® Nev-R-Lube®

Cambered: Yes No OR Drop Center

Spindle Type:

Straight

4" Drop

6" Drop (3.5K)

Brake Type:

Electric

Single Servo Hydraulic

Nev-R-Adjust® Electric

Duo Servo Hydraulic

Disc Hydraulic

Free Backing Hydraulic

Park:

Wheel Bolt Pattern: 5 on 4.50 5 on 5.50 6 on 5.50

5 on 5.00 5 on 4.75 8 on 6.50

Idler: (2K 5 on 4.50) 5.50" Diameter Hub 6.50" Diameter Hub

Stud Size: 1/2" 9/16" 5/8" Flgd 5/8" Coned/Clamp Ring

Pre-wired: (Standard on Electric Brake Axles) Yes No

Spring Type: Double Eye Slipper

Spring Capacity: _____

Spring Seats: Under Axle Over Axle Loose

Axle Finish: No-Paint Paint Powder Coat

E-Coat Galvanized

Notes: _____

IN CASE OF CUSTOMER ERROR:

Dexter builds axles to order per customer specifications. Please be sure all dimensions and specifications are correct. Axles are subject to a 50% restock fee if returned & the customer is responsible for all freight charges incurred for the original shipment & return. Some combinations may not work pending on options chosen or may not apply.




LEAF SPRING


SUSPENSION AXLES

LIGHT DUTY
2,000 - 8,000 LBS.
CAPACITY

STRAIGHT AXLE

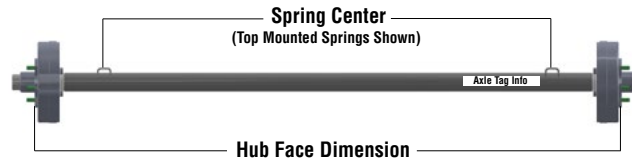


DROP AXLE

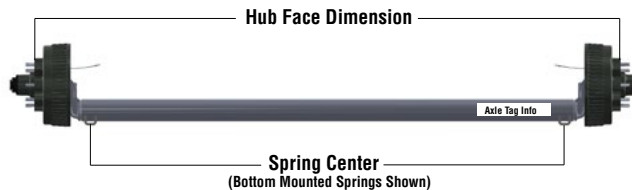


DROP CENTER AXLE




STRAIGHT AXLE

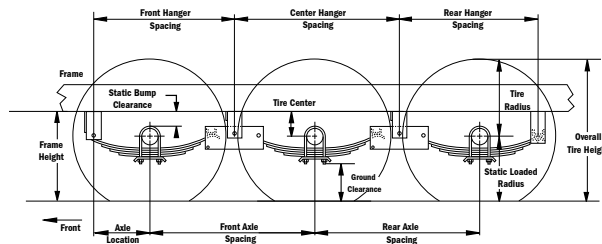

SPRING TYPE




DOUBLE EYE

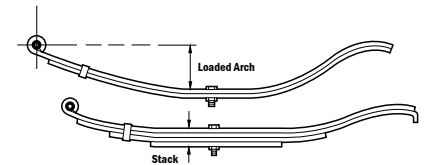


SLIPPER SPRING


SPRING POSITION

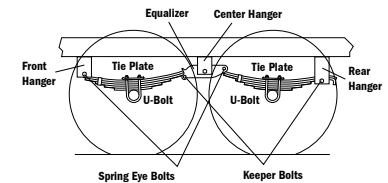

OVERSLUNG SHOWN

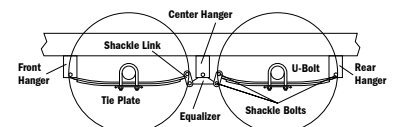


UNDERSLUNG SHOWN



SPINDLE

Drop



Straight

